


## 2 Gang 13A Switched Socket + 2 USB Ports A+C PD45W - Flat Plate

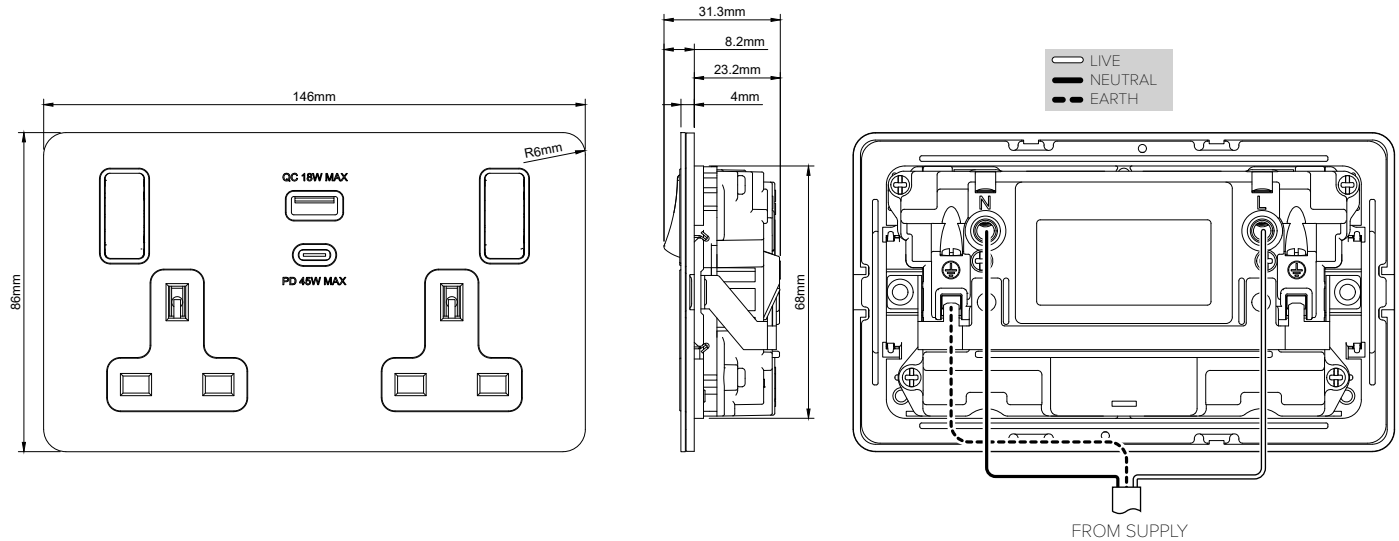

### TECHNICAL SPECIFICATION

Standard(s)	BS 1363-2, BS EN 62368-1	
Voltage Rating	13 Amp, 250V~	
Fast Charge Protocol	USB PD (TYPE C ONLY), QC 2.0, QC 3.0, PE, SCP, FCP, AFC.	
USB Output	OUTPUT: 45W MAX	
	TYPE C ONLY	TYPE A + C
	5V ≡ 3.0A, 9V ≡ 3.0A, 12V ≡ 3.0A, 15V ≡ 3.0A, 20V ≡ 2.25A	TYPE A: 5-12V ≡ 18W MAX TYPE C: 5V ≡ 3.0A, 9V ≡ 3.0A, 20V ≡ 1.35A 12V ≡ 2.25A, 15V ≡ 1.8A
Contact Gap	Normal Gap	
Mounting Box Depth (Min)	35mm	
Terminal Capacity	3 x 2.5mm <sup>2</sup> , 2 x 4.0mm <sup>2</sup> , 1 x 6.0mm <sup>2</sup>	
Earth Terminal Capacity	3 x 2.5mm <sup>2</sup> , 2 x 4.0mm <sup>2</sup> , 1 x 6.0mm <sup>2</sup>	
Outlet Protection Shutter	Yes	
Fixing Centres	120.6mm	
Size	86mm x 146mm x 4mm (Plate thickness)	
Product Class 1	Product must be earthed	
Ambient Operating Temperature	-5° to +40°C	
Recommended Location	Internal Use Only	
Maximum Installation Altitude	2000m	
IP Rating	IP2XD	
Switched Poles	Single Pole	
Mains Frequency	50hz - 60hz	
Trademarks	The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018	