


20A 1 Gang DP Switch + Neon - Traditional Plate

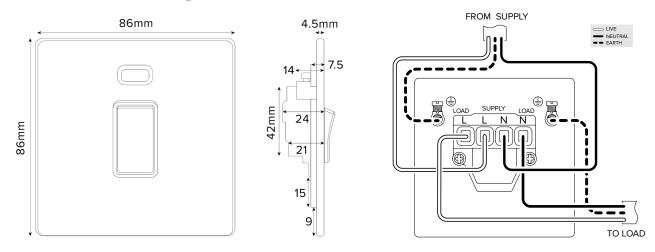

TECHNICAL SPECIFICATION

| Standard(s) | BS EN 60669-1 |
|-------------------------------|--|
| Voltage Rating | 20 Amp, 250V~ |
| Contact Gap | Normal Gap |
| Mounting Box Depth (Min) | 25mm |
| Terminal Capacity | 3 x 2.5mm², 3 x 4.0mm², 2 x 6.0mm² (L&N) |
| Earth Terminal Capacity | 3 x 2.5mm², 2x 4.0mm², 1x 6.0mm² (Earth) |
| Fixing Centres | 60.3mm |
| Size | 86mm x 86mm x 4.5mm (Plate thickness) |
| Product Class 1 | Face plate must be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| IP Rating | IP2XD |
| Switched Poles | Double |
| Mains Frequency | 50hz - 60hz |
| Contact Gap Minimum | 3mm |
| Trademarks | The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018 |

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.



The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.