


SKT752

2 Gang 13A DP Switched Socket RCD Latched-30mA Type A

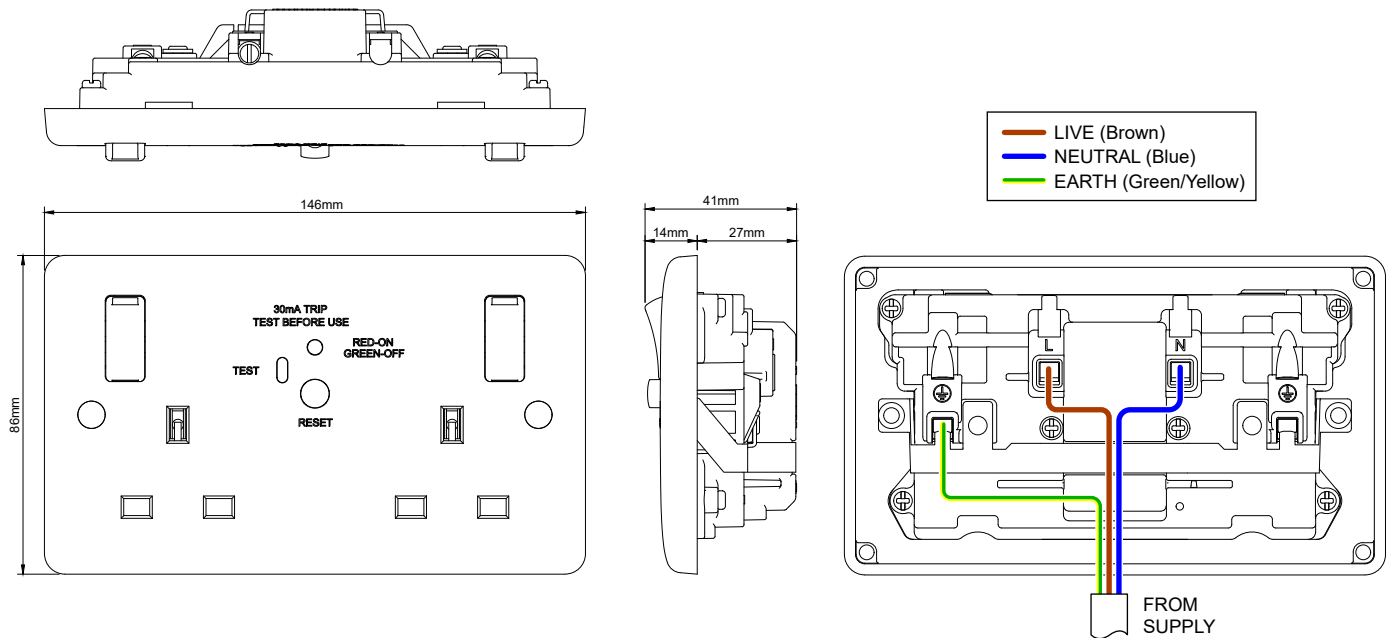

TECHNICAL SPECIFICATION

Standard(s)	BS 7288; BS 1363-2
Voltage Rating	13A , 250V~
RCD Type	Type A
Mechanical Latching	Passive / Latching type
Switch Type	Double Pole
Contact Gap	Normal Gap
RCD Contact Break	Double Pole
Max Tripping current	Type A: AC & Pulsating DC 30mA
Average Trip Time	30ms
Terminal Capacity	3 x 2.5mm ² , 2 x 4mm ² , 1 x 6mm ²
Fixing Centres	120.6mm
Mounting Box Depth	35mm
Size	86mm x 146mm x 10mm (Plate thickness)
Product Class 1	Product must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Mains Frequency	50hz - 60hz
Trademarks	The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018