


### 13A Unswitched Connection Unit Flex Outlet

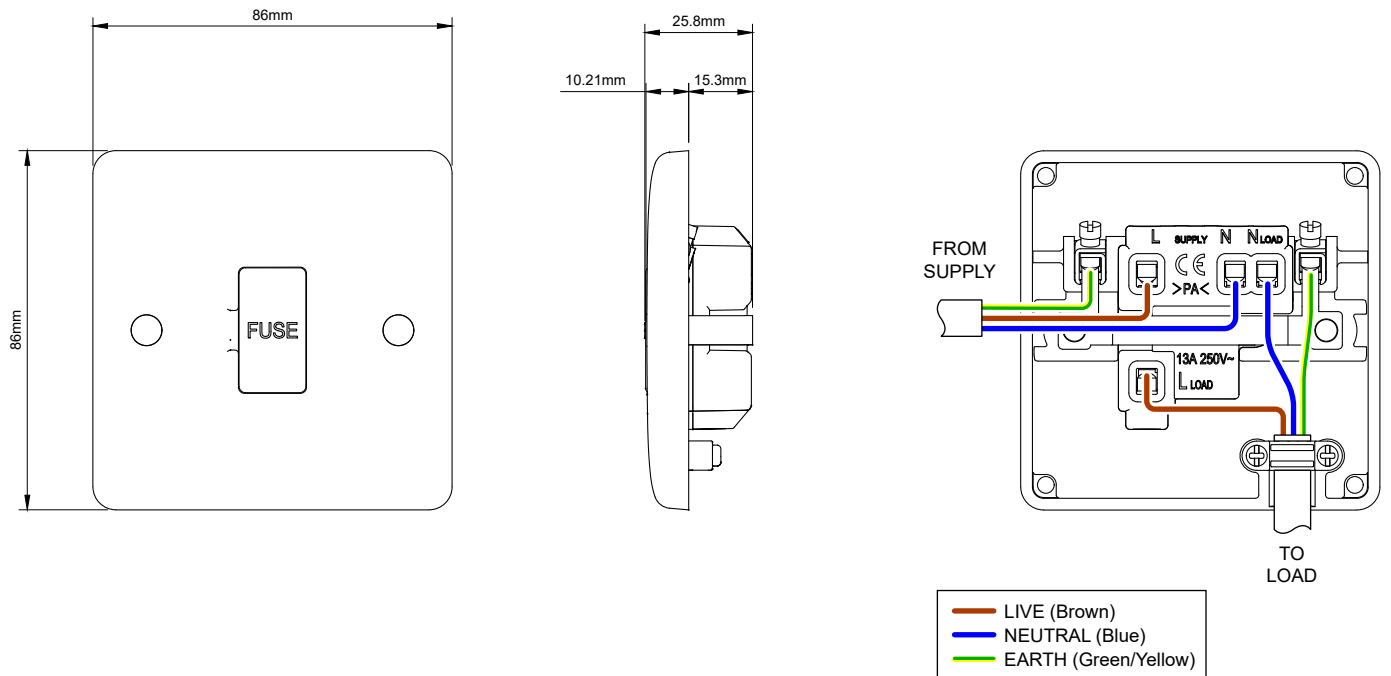

TECHNICAL SPECIFICATION	
Standard(s)	BS 1363-4
Voltage Rating	13 Amp, 250V~
Mounting Box Depth (Min)	25mm
Terminal Capacity	3 x 2.5mm <sup>2</sup> , 3 x 4.0mm <sup>2</sup> , 2 x 6.0mm <sup>2</sup>
Fixing Centres	60.3mm
Size	86mm x 86mm x 10.3mm (Plate thickness)
Product Class 1	Product must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Mains Frequency	50hz - 60hz
Trademarks	The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018