


20A Double Pole Switch Engraved 'Microwave' - Grid Module

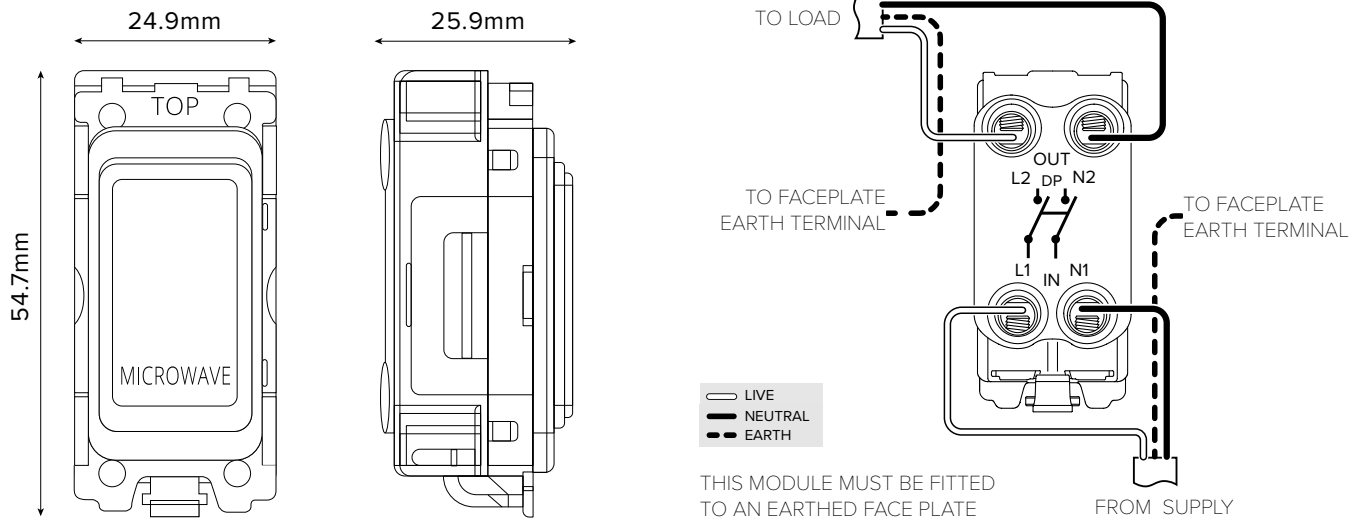

TECHNICAL SPECIFICATION

| | |
|-------------------------------|--|
| Standard(s) | BS EN 60669-1 |
| Voltage Rating | 20 Amp, 250V~ (20AX – no derating for inductive or fluorescent loads) |
| Contact Gap | Normal Gap |
| Mounting Box Depth (Min) | 35mm |
| Terminal Capacity | 4x 1.5mm ² , 2x 2.5mm ² & 1x 4.0mm ² |
| Size | 54.7mm x 25mm x 30.1mm |
| Product Class 1 | Face plate must be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| IP Rating | IP2XD |
| Switched Poles | Double |
| Mains Frequency | 50hz - 60hz |
| Contact Gap Minimum | 3mm |
| Trademarks | The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018 |