


SKT722



13A 2 Gang USB Switched Socket (USB Output 3.1amp)

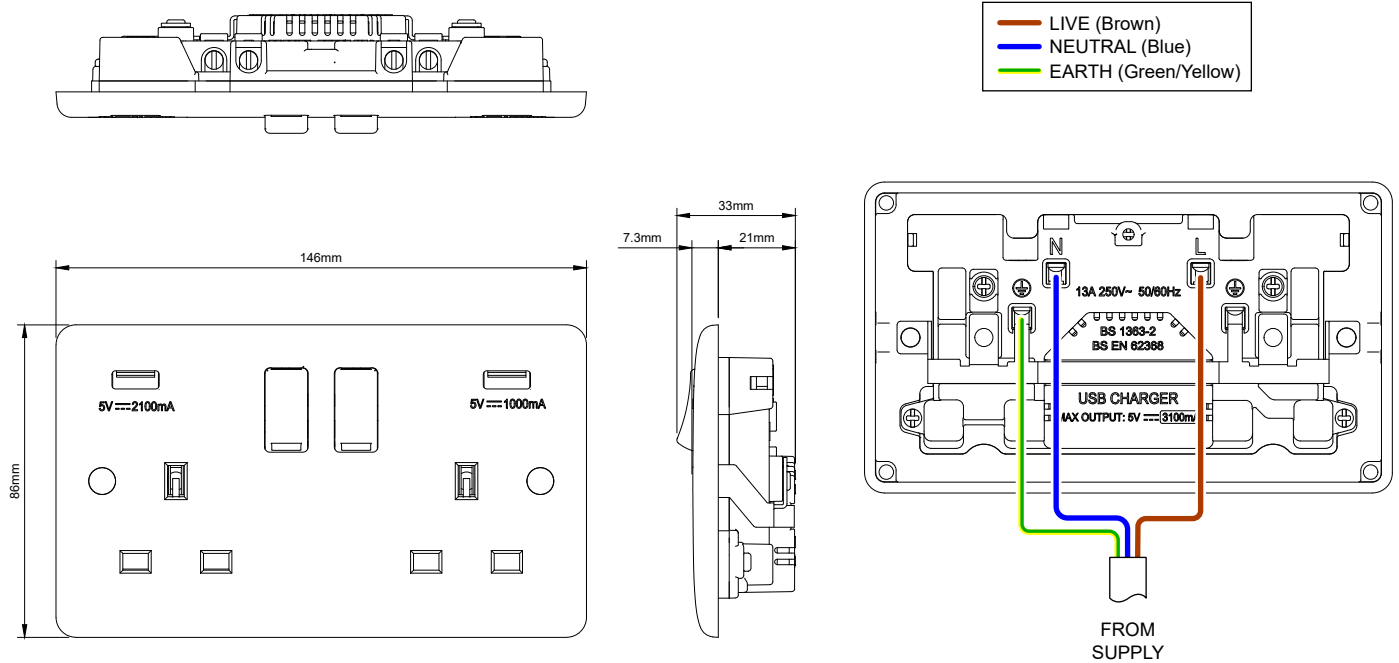

TECHNICAL SPECIFICATION	
Standard(s)	BS 1363-2, BS EN 62368-1, BS 62680-1-1
Input	13 Amp, 250V~
Output	5V ~ 3100mA
Switch Type	Double Pole
Mounting Box Depth (Min)	35mm
Terminal Capacity	3 x 2.5mm ² , 3 x 4.0mm ² , 2 x 6.0mm ²
Fixing Centres	120.6mm
Size	146mm x 86mm x 7.3mm (Plate thickness)
Product Class 1	Product must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP20
Mains Frequency	50hz - 60hz
Trademarks	The Lieber Company is a registered trade mark number: UK00003313578 Date: 26 May 2018

